



Connecting your ViP series receiver to broadband.

Page 2: Wired Instructions

Page 6: Wireless Instructions

Page 12: SlingLink Turbo Instructions




Connecting your ViP series receiver to broadband.

Wired Instructions

Wired Connection - Step 1


Next ▶

Connect an ethernet cable from the port on the back of your ViP series receiver to an open port on your router.

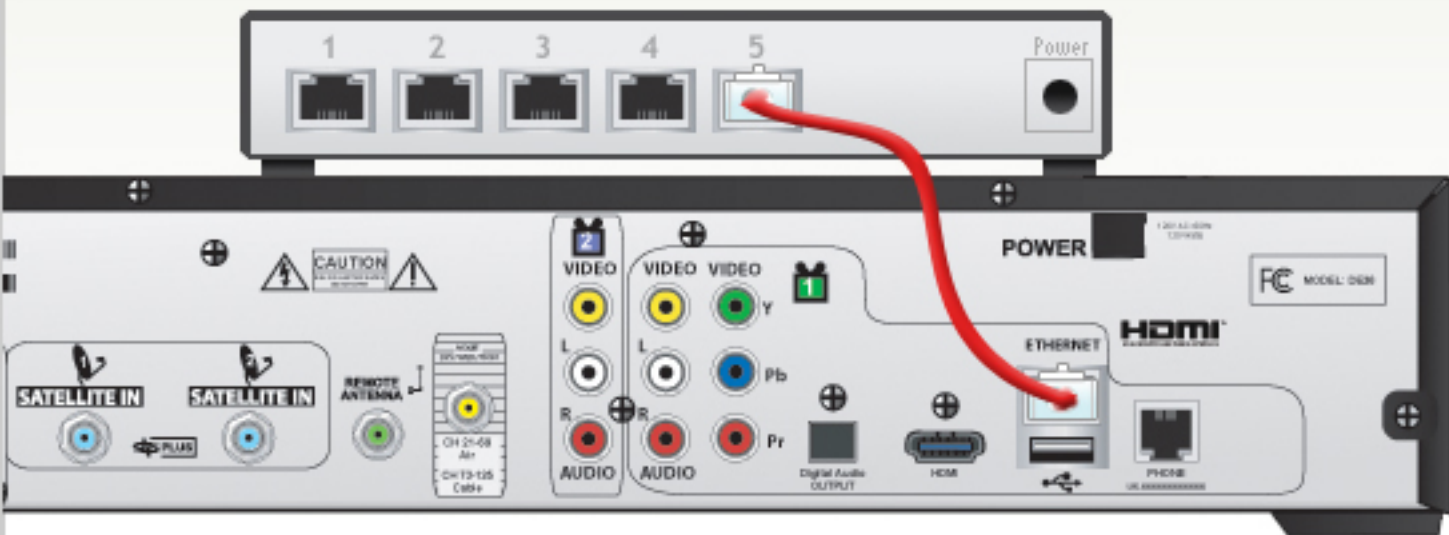


Wired Connection - Step 2

Test your connection by pressing MENU on your DISH Network Remote. Select "System Setup" and then "Diagnostics".

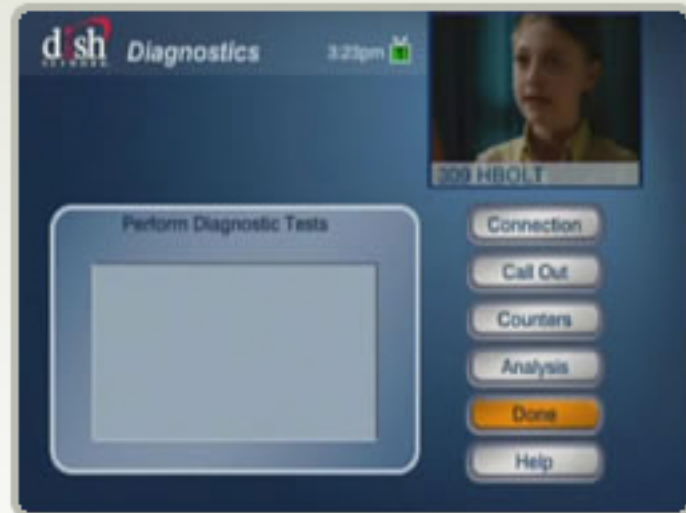

Select "Connection" to start the test. If the result says "Broadband Connection OK", you are done. Press VIEW LIVE TV on your remote to return to programming.

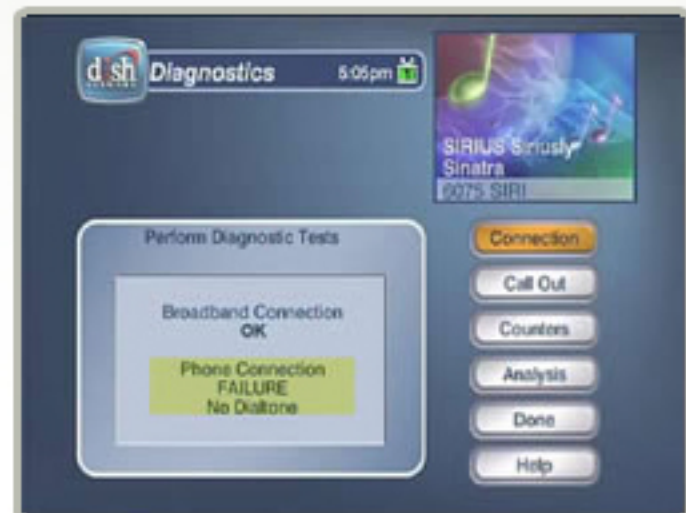

If your diagnostic test shows “Broadband Connection FAILURE”, ensure your cables are all connected securely, reset your router and retry the connection test.



If your connection test is still unsuccessful, please call tech support at 1-888-686-2388.



Connecting your ViP series receiver to broadband.

Wireless Instructions


Wireless Connection - Step 1

Next ▶


Connect the USB extender to the USB port on the back of your DISH Network receiver and then connect the extender to the wireless connector.




Select "Setup" on the pop-up that appears on your TV screen.

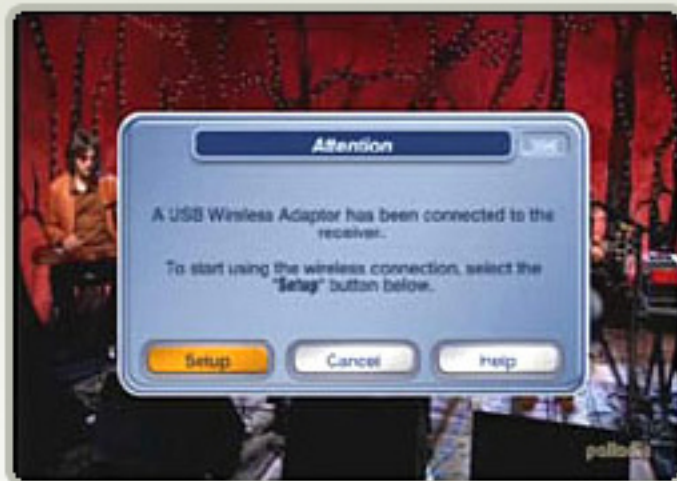


Choose your wireless network from the list and select "Done".

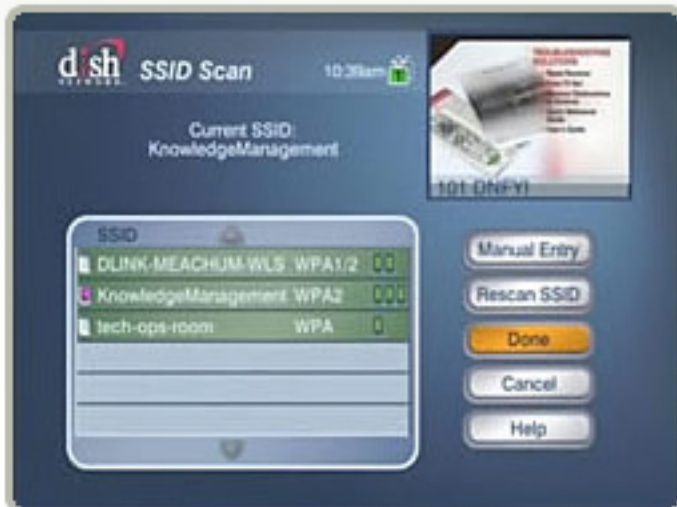


Enter your wireless network password (WEP or WPA) and select done. A connection test will begin. When the test finishes, select "Done".

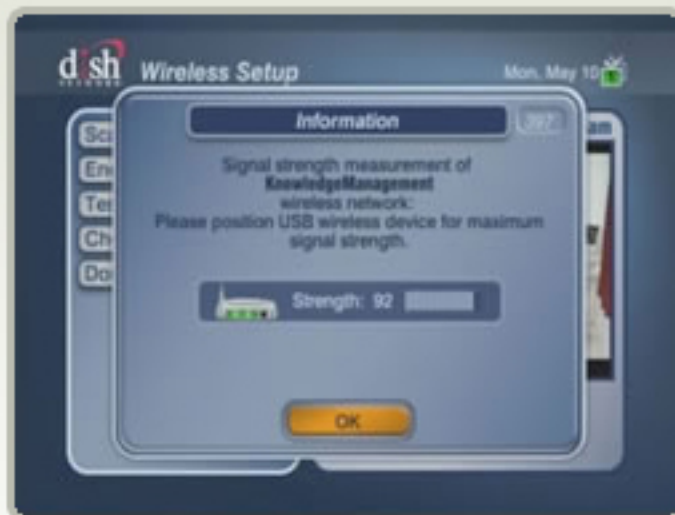

Verify that your wireless signal strength is above 40. If not, try moving the wireless dongle to get a better signal. Select OK.

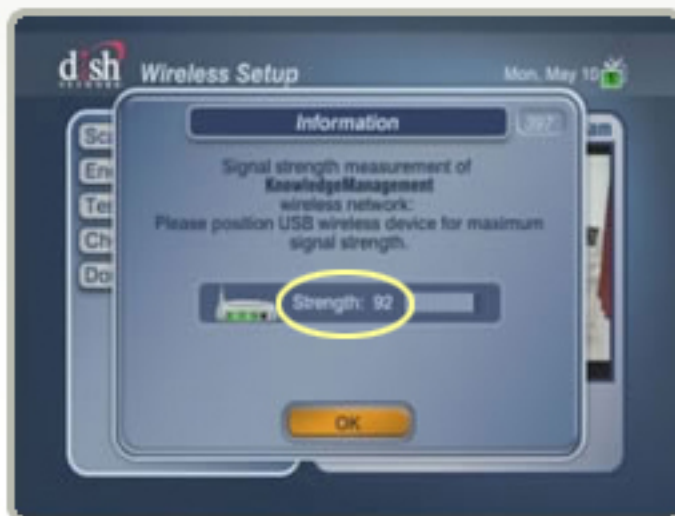


Test your connection by pressing MENU on your DISH Network Remote. Select "System Setup" and then "Diagnostics".

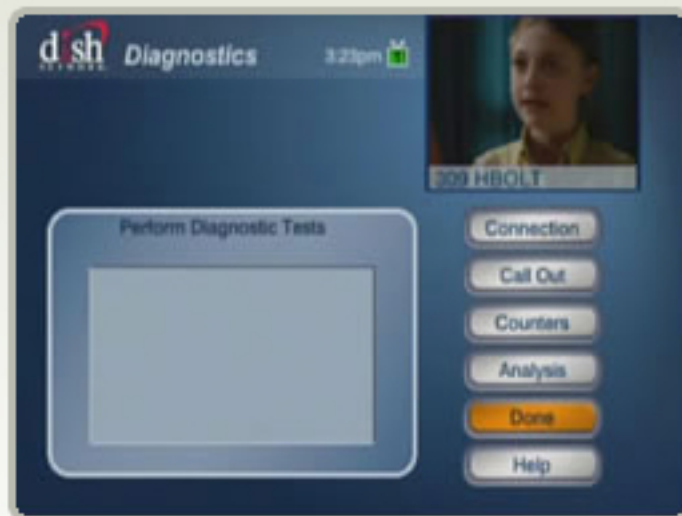

Select "Connection" to start the test. If the result says "Broadband Connection OK", you are done. Press VIEW LIVE TV on your remote to return to programming.



If your diagnostic test shows “Broadband Connection FAILURE”, ensure your cables are all connected securely, reset your router and retry the connection test.

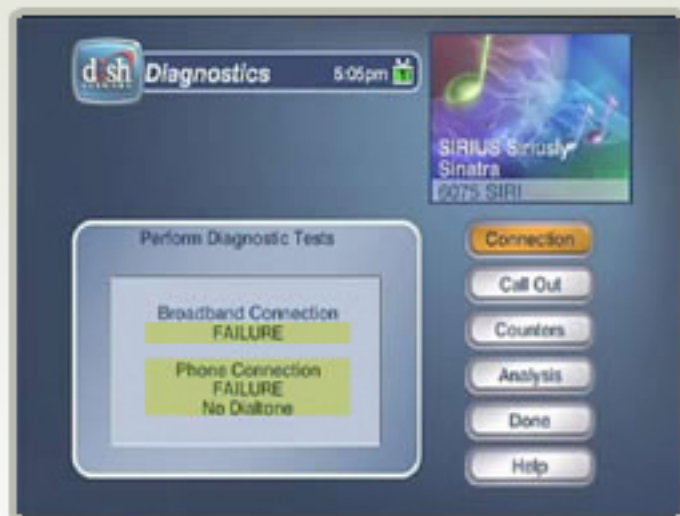

If your connection test is still unsuccessful, please call tech support at 1-888-686-2388.




Connecting your ViP series receiver to broadband.

SlingLink Turbo Instructions

SlingLink™ Turbo Connection - Step 1

Next ▶


Find the power outlet closest to your modem/router and plug in the SlingLink Turbo adapter. Do not use a surge protector or power strip.

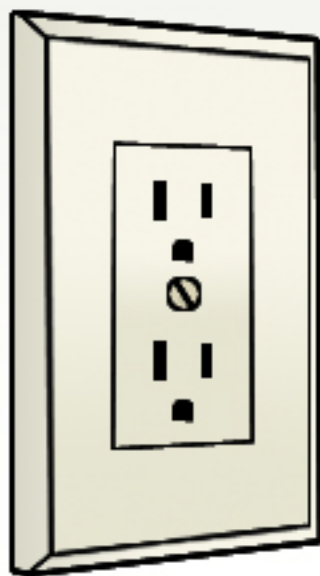

SlingLink™ Turbo Connection - Step 2

◀ Previous | Next ▶

Connect an ethernet cable from your modem/router to the ethernet port on your SlingLink™ Turbo adapter.

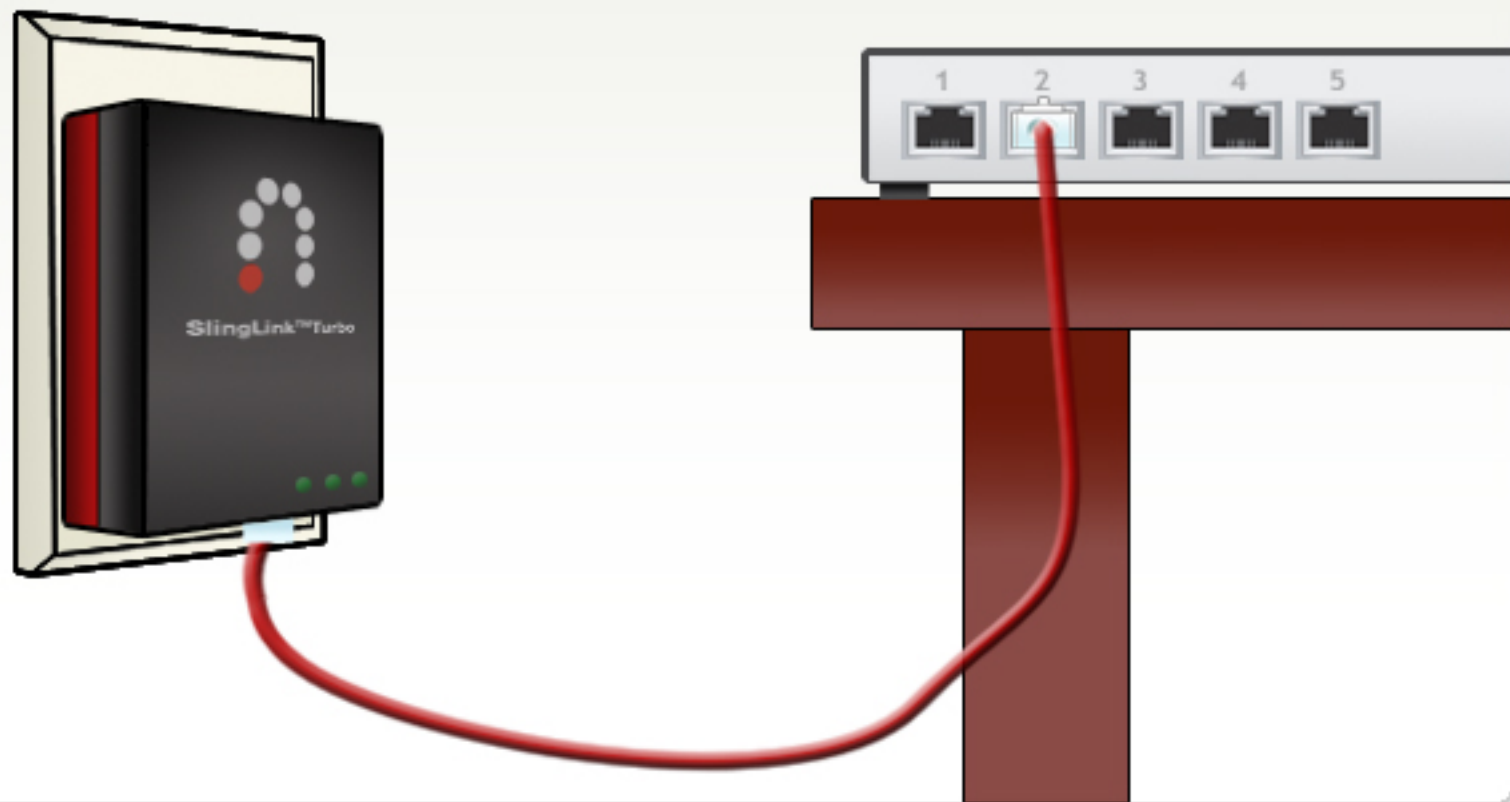


SlingLink™ Turbo Connection - Step 3

◀ Previous | Next ▶

Unplug the receiver from the electrical outlet for 10 seconds and then plug back in. It will take about 5 minutes for the receiver to power back on.



Test your connection by pressing MENU on your DISH Network Remote. Select "System Setup" and then "Diagnostics".

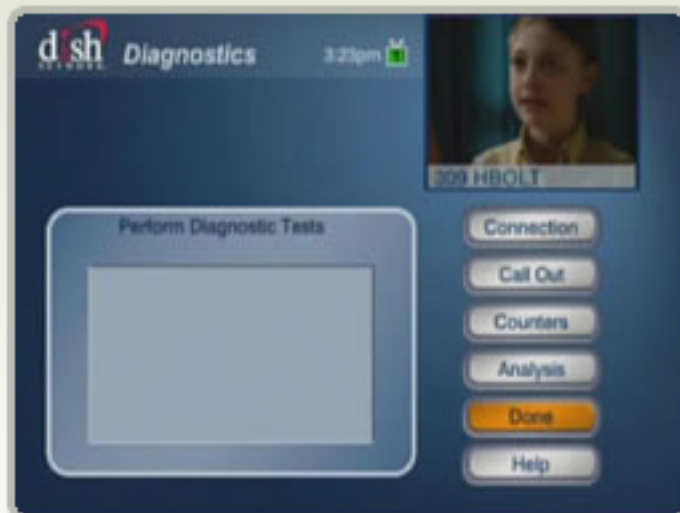

Select "Connection" to start the test. If the result says "Broadband Connection OK", you are done. Press VIEW LIVE TV on your remote to return to programming.



If your diagnostic test shows “Broadband Connection FAILURE”, ensure your cables are all connected securely, reset your router and retry the connection test.



If your connection test is still unsuccessful, please call tech support at 1-888-686-2388.